


ENERGIZER NO. CR1225



Industry Standard Dimensions


mm (inches)

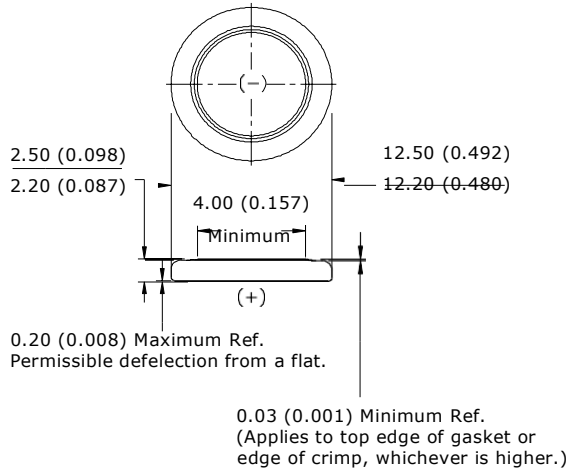

Specifications

- Classification:** "Lithium Coin"
- Chemical System:** Lithium / Manganese Dioxide (Li/MnO₂)
- Designation:** ANSI-5020LC, IEC-CR1225
- Nominal Voltage:** 3.0 Volts
- Typical Capacity:** 50 mAh (to 2.0 volts)
(Rated at 45K ohms at 21°C)
- Typical Weight:** 0.9 grams (0.02 oz.)
- Typical Volume:** 0.3 cubic centimeters (0.02 cubic inch)
- Max Rev Charge:** 1 microampere
- Energy Density:** 161 milliwatt hr/g, 518 milliwatt hr/cc
- Shipping:** For complete details, please reference:
Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations
United States: 49 CFR 173.185

Cross Section

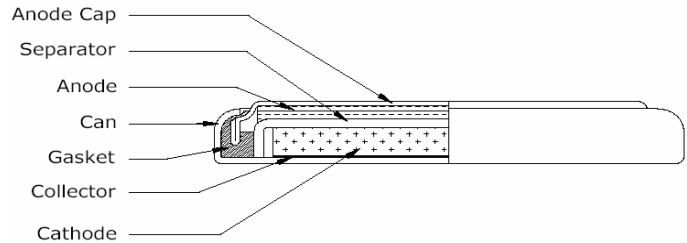

Typical Discharge Characteristics

Load: 45K ohms - Continuous
Typical Drain @ 2.9V: 0.064 mA



Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.9V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.064	45,000	817

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

©Eveready Battery Company, Inc. - All Rights Reserved